2. Exploded View & Parts List

2-1 CS29A11SSGXBWT

You can search for the updated part code through ITSELF web site.
URL : http://itself.sec.samsung.co.kr

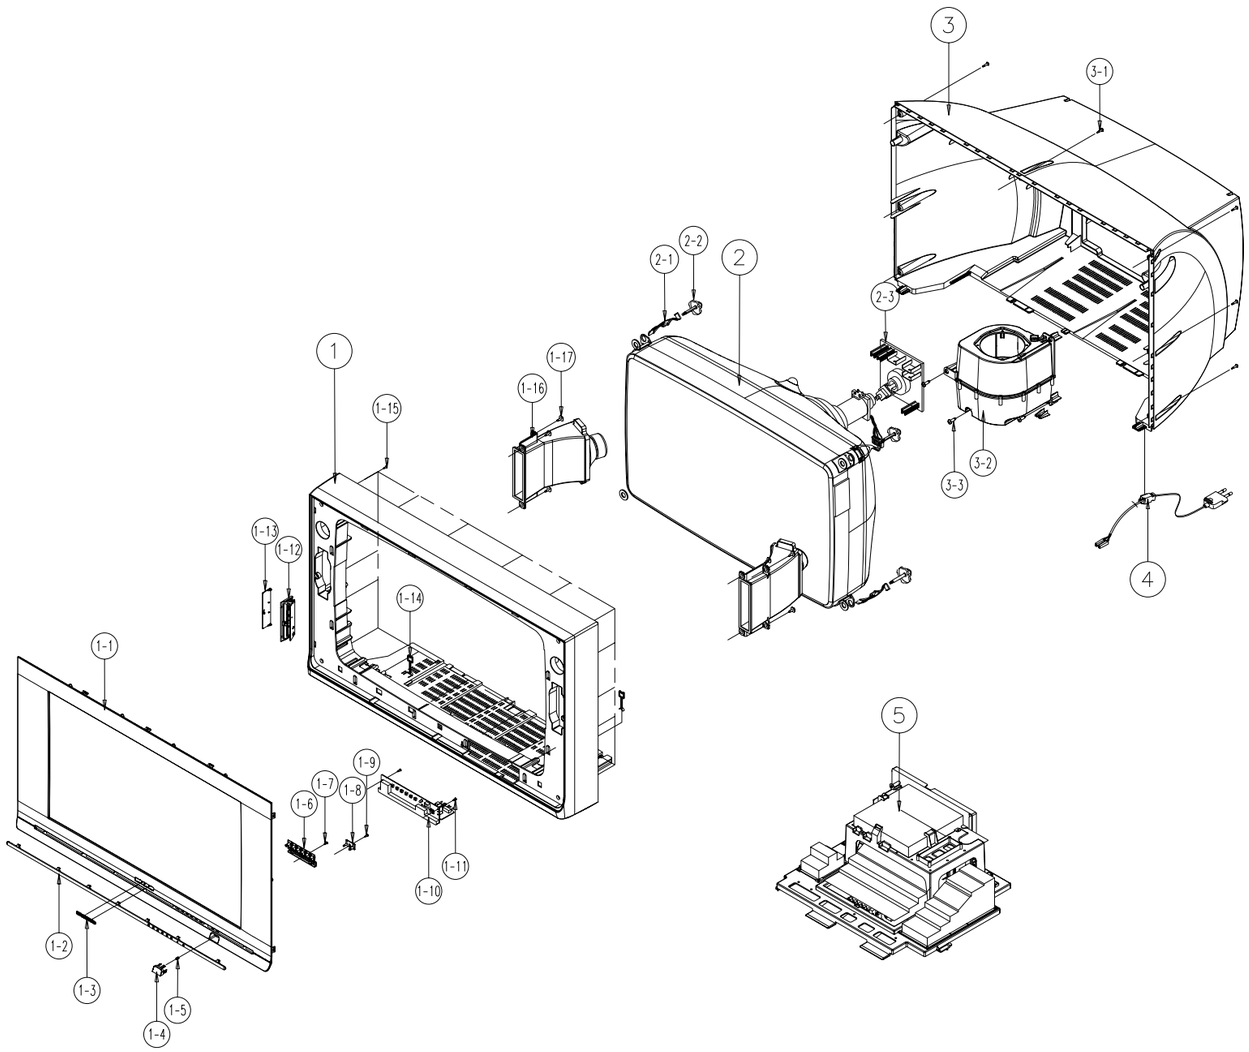

No	Code No	Description;Specification	Q'ty	Remark	S.N.A
1	AA96-01452A	ASSY COVER P-FRONT;29A11SS,HIPS HB,G4309	1		S.N.A
1*	AA64-03329B	CABINET FRONT;29A11,HIPS HB,G4309,SV012P	1		
1-1	AA64-03332A	CABINET-MASK;29A11SS,HIPS,HB,G4309,SV012	1		
1-2	AA63-00655A	COVER-DECORATION;29A11,ABS,HB,G4309,SVM3	1		S.N.A
1-3	AA64-01062B	BADGE-BRAND;32Z5,AL FORGING,-,-,L65,-,SI	1		S.N.A
1-4	AA64-03345A	KNOB-POWER;32A11,ABS,HB,G4309,SVM3012	1		
1-5	AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,	1	KNOPOW	S.N.A
1-6	AA64-03344A	KNOB-CONTROL;32A11,ABS,HB,G4309,SVM3132	1		
1-7	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	2	KC+CM	S.N.A
1-8	AA64-03338A	WINDOW-RMC,LED;32A11,PC,CLR	1		
1-9	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	1	RMC+CM	S.N.A
1-10	AA94-12683A	ASSY PCB MISC-CONTROL;,K55A	1		
1-11	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	4	CP+CM	S.N.A
1-12	AA94-12841A	ASSY PCB MISC-MASTER;,K55A	1		
1-13	AA94-12776A	ASSY PCB MISC-SIDE A/V;,K55A	1		
1-14	AA65-00011C	CLAMPER CORE-WIRE;ALL MODEL,NYLON 66,V2,	1		S.N.A
1-15	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR	20	CM+CF	S.N.A
1-16	AA91-00507A	ASSY HOLDER SPK;-,-,8OHM/15W,-,ASSY HOLD	1		
1-17	6006-001095	SCREW-ASS'Y TAPT;WP,BH,+,M4,L12,ZPC(YEL)	4	SPK+CF	S.N.A
2	AA91-02173Q	ASSY CPT;A68QCP891X004,29,+380MG,ITC,CT	1		S.N.A
2-1	AA65-00019A	CLAMPER CORE-D,COIL;25-34,NYLON 66,V2,N	4		S.N.A
2-2	AA60-10050V	SCREW-ASSY;-,SWRCH18A,M6,L30,HH,+,WC,-,Z	4	CRT+CF	
2-3	AA94-12977A	ASSY PCB MISC-CRT;CS29A11,K55A	1		
3	AA64-03330B	CABINET BACK;29A11,HIPS FV2,GR503	1		
3-1	AA60-10050T	SCREW-TAPPING;-,SWRCH18A,M4,L20,RH,+,2S,	7	CB+CF	S.N.A
3-2		SPEAKER			
3-3		SCREW			
4	AA96-20130F	ASSY POWER CORD;-,CP2/NO(4.0R),H/C 250mm	1		S.N.A